

Compact hydraulic power unit

Type BKA


Single- and two-stage **up to 700 bar**

LP: 100 bar / 2,8 to 10,4 l/min

HP: 700 bar / 0,3 to 1,8 l/min

Features

- Compact design
- Self-venting
- Various combinations possible
- Single- or two-stage models

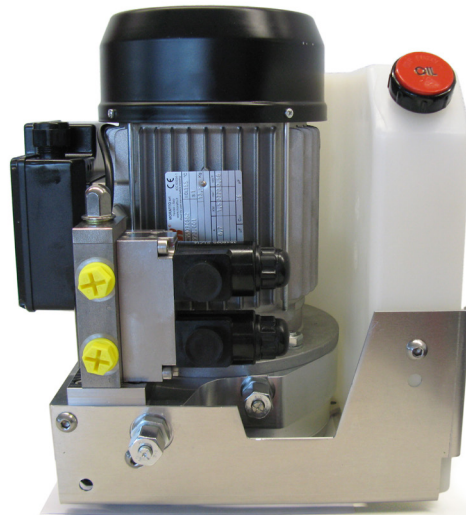

Applications

- Presses
- Rescue equipment
- Punching
- Torque wrenches
- Clamping tools
- Test equipment
- Crimping tools
- General mobile applications

Design

- Integrated low-pressure unloading valve
- Integrated pressure relief valve
- Assembly of valve banks possible
- Standard interface for electric motors from 0,55 to 2,2 kW
- Various tank sizes

Technical Data

Hydraulic fluid	mineral oil according to DIN ISO 6743-4 (other fluids on request)	
Fluid temperature range	-20 to 80 °C	
Ambient temperature range	-20 to 50 °C	
Viscosity range	12 to 220 mm ² /s	
Max. operating pressure HP	700 bar (preset to 700 bar, other presettings on request)	
Max. operating pressure LP	150 bar (preset to 100 bar, other presettings on request)	
Noise level	approx. 86 dB (at 3'000 min ⁻¹ / 3'600 min ⁻¹) approx. 78 dB (at 1'500 min ⁻¹ / 1'800 min ⁻¹)	
Filtration (recommended)	according to NAS 1638 class 6 resp. ISO/DIN 4406 17/15/12	
Dimensions and weight	see dimension table page 6	
Installation position	vertical	
Material	excentric shaft:	steel
	pump housing:	aluminium
	tank:	plastic, stainless steel, aluminium

Type BKA

LP: 100 bar / 2,8 to 10,4 l/min

HP: 700 bar / 0,3 to 1,8 l/min

Type code

Example

BKA - **E** - **1** **15** - **1,1** - **0,60/700** - **3,32/100** - **2** - **M** - **00**

Bieri compact power unit

Drive E (electrical motor)

For electrical motors

- 1 (1-phase 230V)
- 2 (1-phase 115V)
- 3 (3-phase 230V)
- 4 (3-phase 400V)

Rotation speed

- 15 (1'500 rpm)
- 18 (1'800 rpm)
- 30 (3'000 rpm)
- 36 (3'600 rpm)

Drive power

- 0,55 (0,55 kW)
- 0,75 (0,75 kW)
- 1,1 (1,1 kW)
- 1,5 (1,5 kW)
- 2,2 (2,2 kW)

Flow rate ratio HP / Pressure HP

see table page 5

Flow rate ratio LP / Pressure LP (only for 2-stages)

see table page 5

Tank volume

- 2 2 litre (plastic tank)
- 6 6 litre (plastic tank)
- 7 7 litre (stainless steel tank)


Options

- X (without options)
- M (pressure gauge)
- P (pressure switch)
- S (pressure sensor)

Model

- 00 ... 99
- 00 standard)
- 01 (with bypass valve 24VDC)
- 02 (with bypass valve 230VAC)
- 03 (with bypass valve 110VAC)

Main components

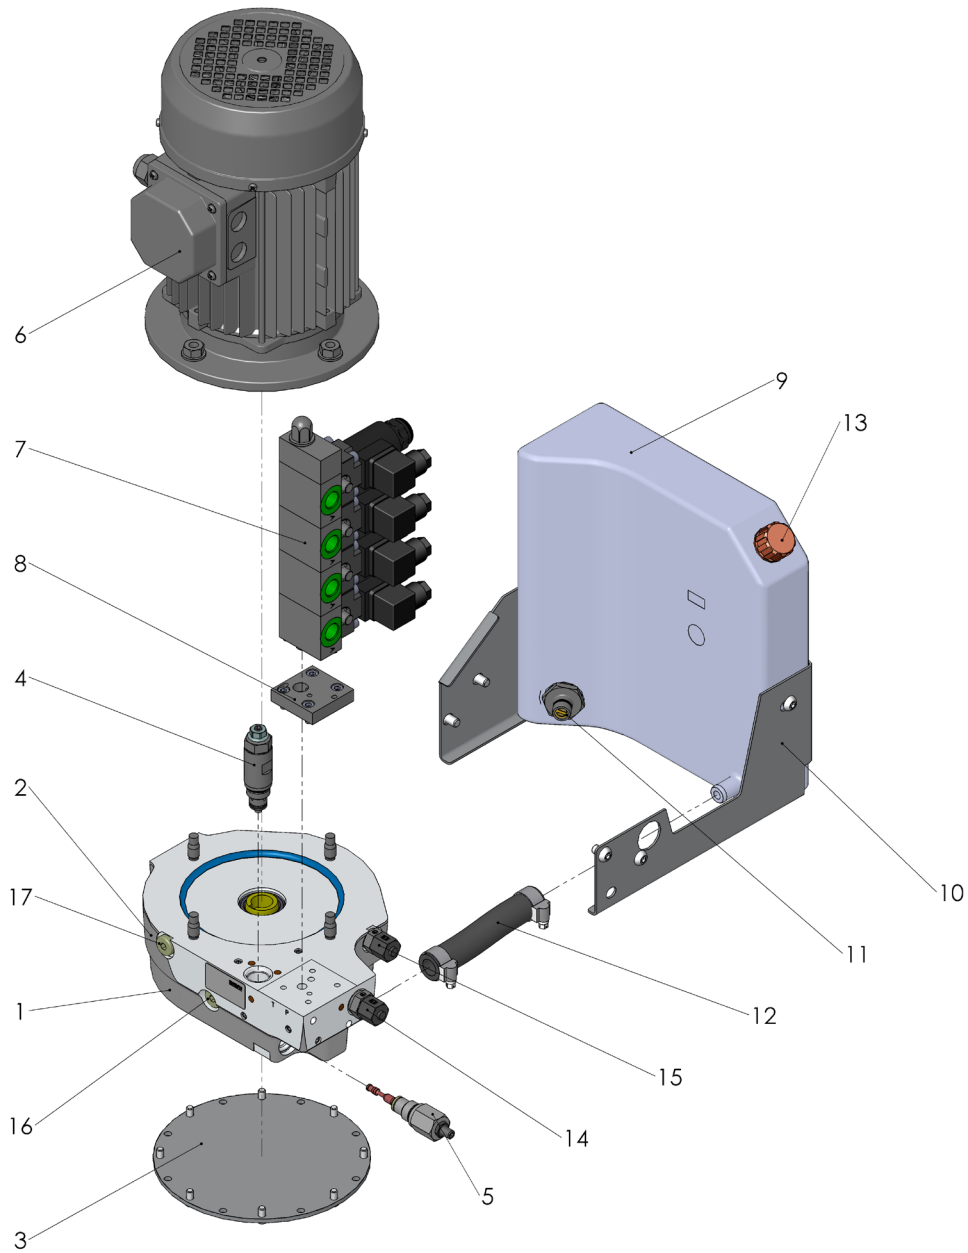


Pos.	Komponente	Pos.	Komponente
1	Pump	10	Tank frame
2	Pump flange	11	Suction
3	Pump lid	12	Return line
4	Pressure relief valve	13	Filling
5	Pressure unloading valve (only for 2-Stage power units)	14	Pressure port with GE screw fitting
6	Electric motor	15	Measuring port with GE screw connection
7	Control valve (optional)	16	Air-vent screw
8	Adapter plate (optional)	17	Low pressure port (only for 2-Stage power units)
9	Tank		

Type BKA

LP: 100 bar / 2,8 to 10,4 l/min

HP: 700 bar / 0,3 to 1,8 l/min

Assembly options

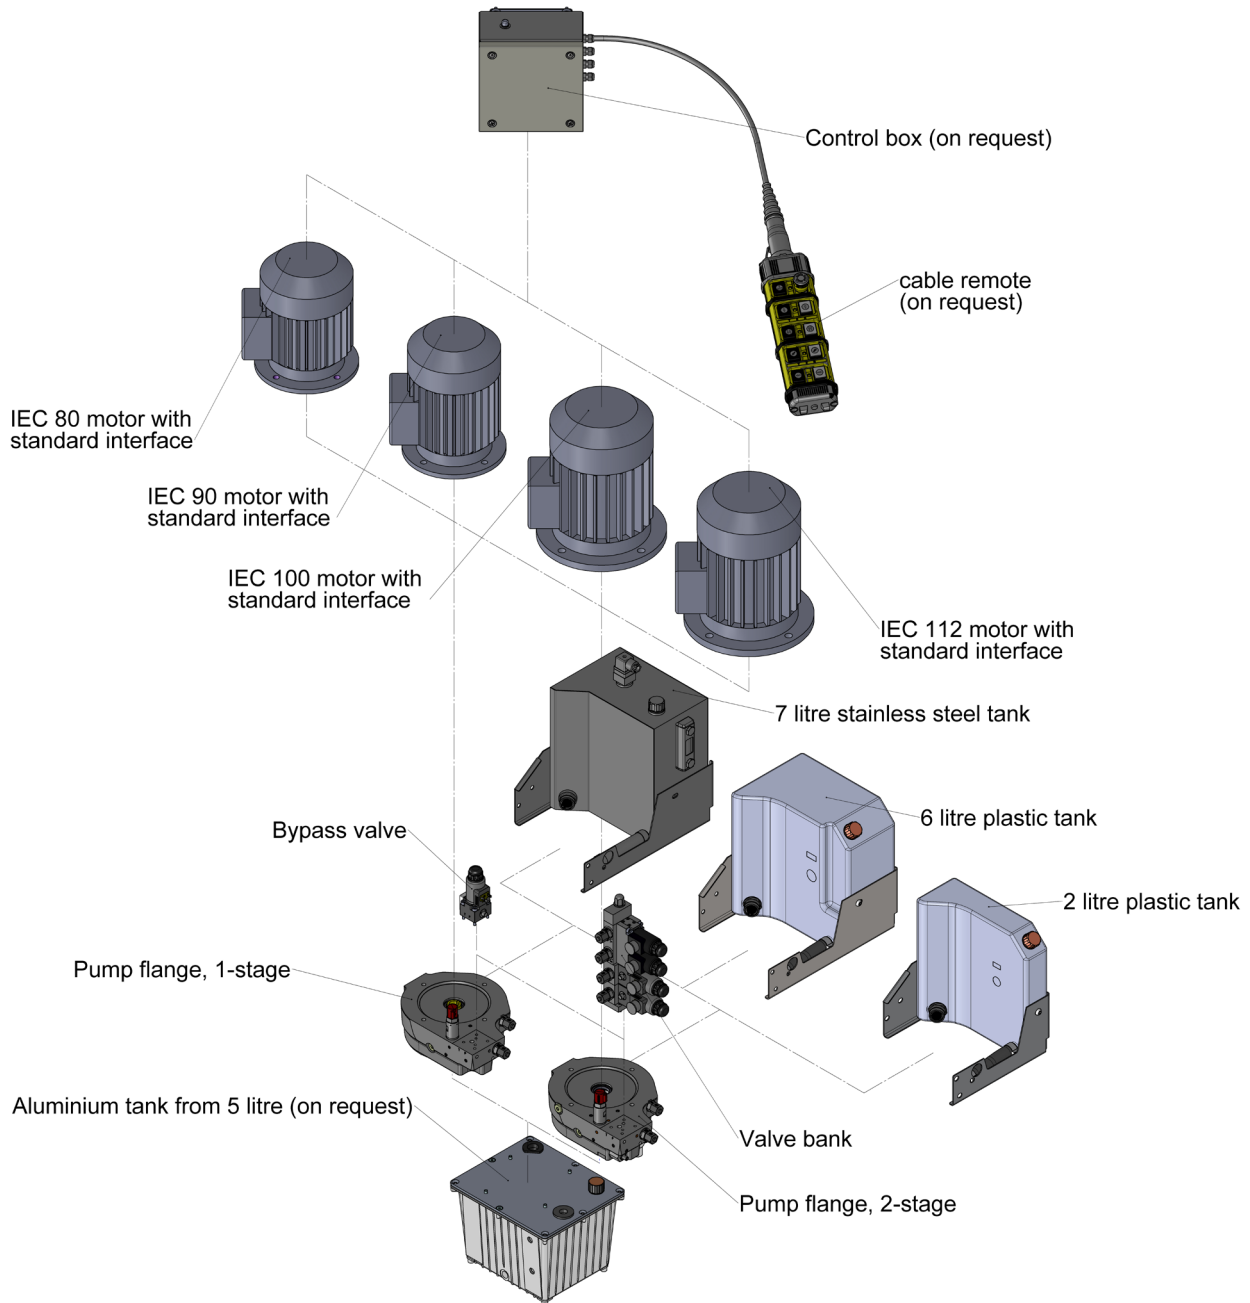

Type BKA

LP: 100 bar / 2,8 to 10,4 l/min
HP: 700 bar / 0,3 to 1,8 l/min

Selection tables flow rates for LP and HP

1-stage unit (1'500 rpm / 1'800 rpm)

1-stage unit (3'000 rpm / 3'600 rpm)

	Flow rate ratio HP	1'500 min ⁻¹ (50 Hz)	Flow rate ratio HP	1'800 min ⁻¹ (60 Hz)	Flow rate ratio HP	3'000 min ⁻¹ (50 Hz)	Flow rate ratio HP	3'600 min ⁻¹ (60 Hz)
Power [kW]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]
0,55	0,31	0,42	0,24	0,40	0,14	0,38	0,14	0,46
0,75	0,38	0,53	0,32	0,54	0,21	0,57	0,17	0,57
1,1	0,59	0,81	0,49	0,81	0,31	0,83	0,27	0,90
1,5	0,85	1,17	0,69	1,14	0,43	1,17	0,38	1,26
2,2	1,22	1,68	0,97	1,62	0,64	1,75	0,54	1,78

2-stage unit (1'500 rpm / 1'800 rpm)

	Flow rate ratio HP	1'500 min ⁻¹ (50 Hz)	Flow rate ratio LP	1'500 min ⁻¹ (50 Hz)	Flow rate ratio HP	1'800 min ⁻¹ (60 Hz)	Flow rate ratio LP	1'800 min ⁻¹ (60 Hz)
Power [kW]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]	Vg (LP) [cm ³ /rev]	Q (LP) [l/min]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]	Vg (LP) [cm ³ /rev]	Q (LP) [l/min]
0,55	0,29	0,40	1,99	2,75	0,24	0,39	1,68	2,80
0,75	0,42	0,58	2,93	4,03	0,34	0,56	2,43	4,04
1,1	0,60	0,83	3,32	4,57	0,47	0,78	3,19	5,30
1,5	0,76	1,06	3,48	4,80	0,68	1,14	3,40	5,65
2,2	1,15	1,58	3,86	5,32	0,94	1,57	3,66	6,08

2-stage unit (3'000 rpm / 3'600 rpm)

	Flow rate ratio HP	3'000 min ⁻¹ (50 Hz)	Flow rate ratio LP	3'000 min ⁻¹ (50 Hz)	Flow rate ratio HP	3'600 min ⁻¹ (60 Hz)	Flow rate ratio LP	3'600 min ⁻¹ (60 Hz)
Power [kW]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]	Vg (LP) [cm ³ /rev]	Q (LP) [l/min]	Vg (HP) [cm ³ /rev]	Q (HP) [l/min]	Vg (LP) [cm ³ /rev]	Q (LP) [l/min]
0,55	0,12	0,32	1,06	2,87	0,12	0,39	0,93	3,04
0,75	0,24	0,64	1,44	3,90	0,17	0,56	1,24	4,08
1,1	0,34	0,92	2,22	6,02	0,24	0,77	1,76	5,78
1,5	0,42	1,14	2,93	7,92	0,34	1,11	2,43	7,97
2,2	0,60	1,63	3,32	8,98	0,47	1,54	3,19	10,44


All performance and flow rates are based on HP 700 bar and LP 100 bar. Values for deviating Pressure settings according to customer specification on request.

Type BKA

LP: 100 bar / 2,8 to 10,4 l/min

HP: 700 bar / 0,3 to 1,8 l/min


Dimensional drawings

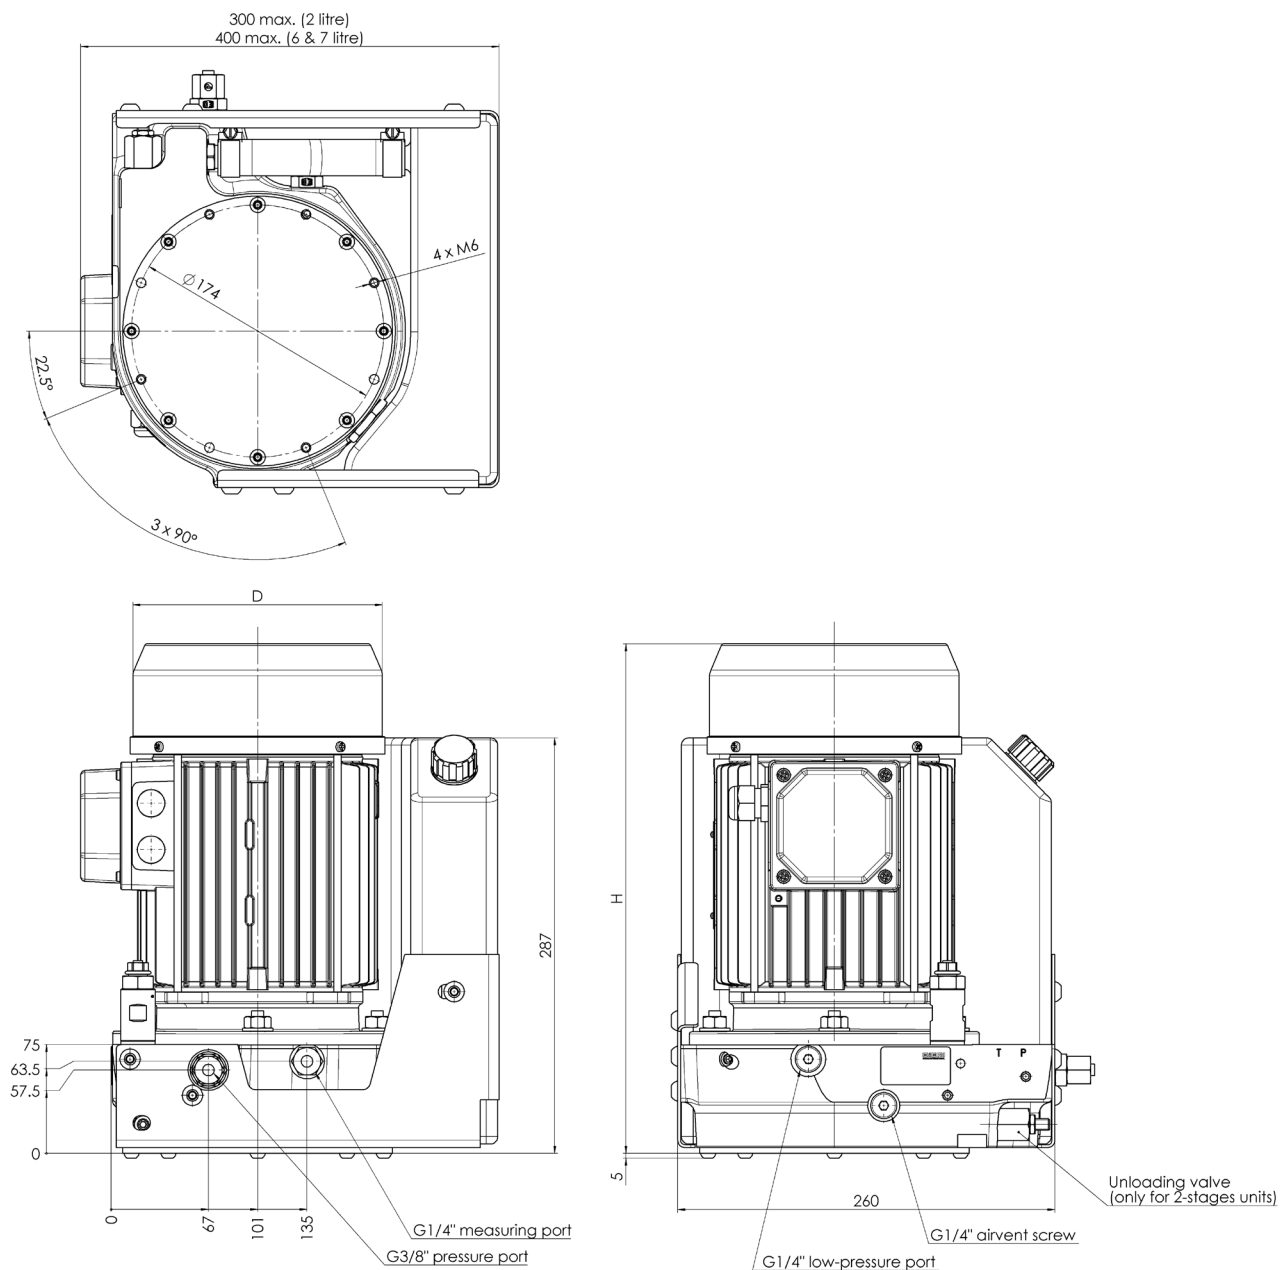


Dimension table [mm]

Motor [kW]	1-phase				3-phase				1-stage	2-stage
	1'500 rpm / 1'800 rpm		3'000 rpm / 3'600 rpm		1'500 rpm / 1'800 rpm		3'000 rpm / 3'600 rpm		Weight approx. (without oil) [kg]	
	D	H	D	H	D	H	D	H		
0,55	160	315	160	315	160	315	160	315	15	18
0,75	160	315	160	315	160	315	160	315	16	19
1,1	175,5	330	160	315	175,5	330	160	315	18	21
1,5	175,5	353	175,5	330	175,5	353	160	315	20	23
2,2	194	382	175,5	353	175,5	353	175,5	353	22	25

Standard interface for electric motor
according to IEC size 80 and B5 flange

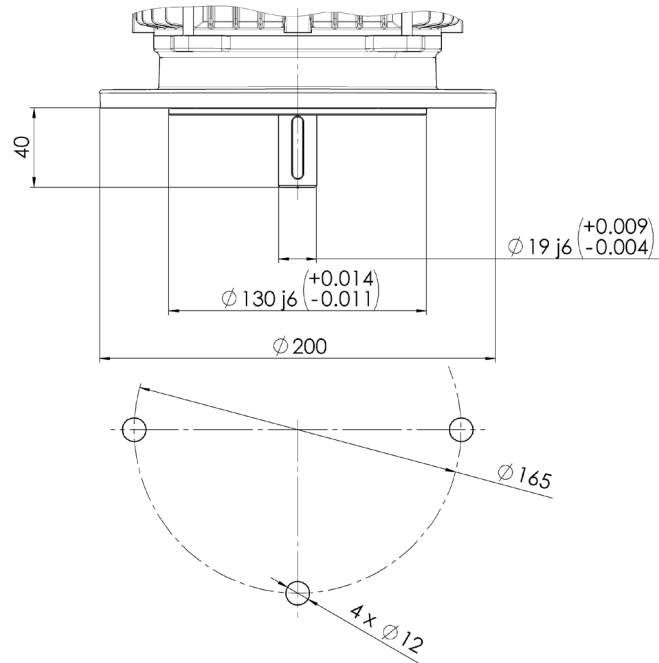


Drilling pattern
according to Bieri

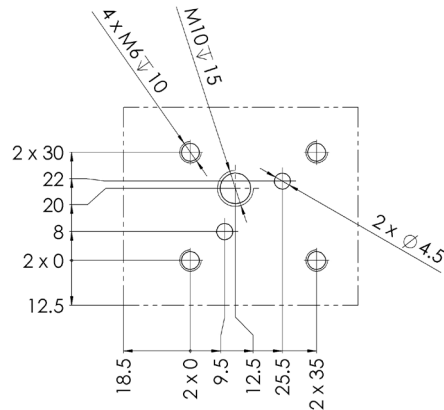


Hydraulic schematics

1-stage unit

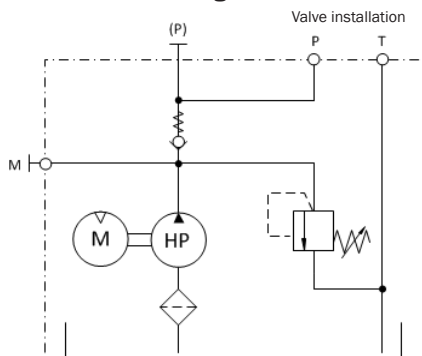

2-stage unit

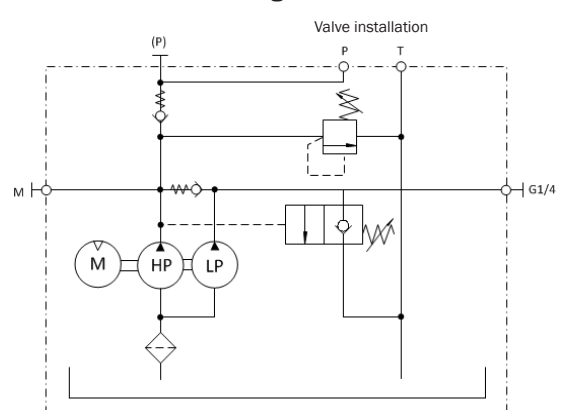


Type BKA


LP: 100 bar / 2,8 to 10,4 l/min

HP: 700 bar / 0,3 to 1,8 l/min



Functional schematic

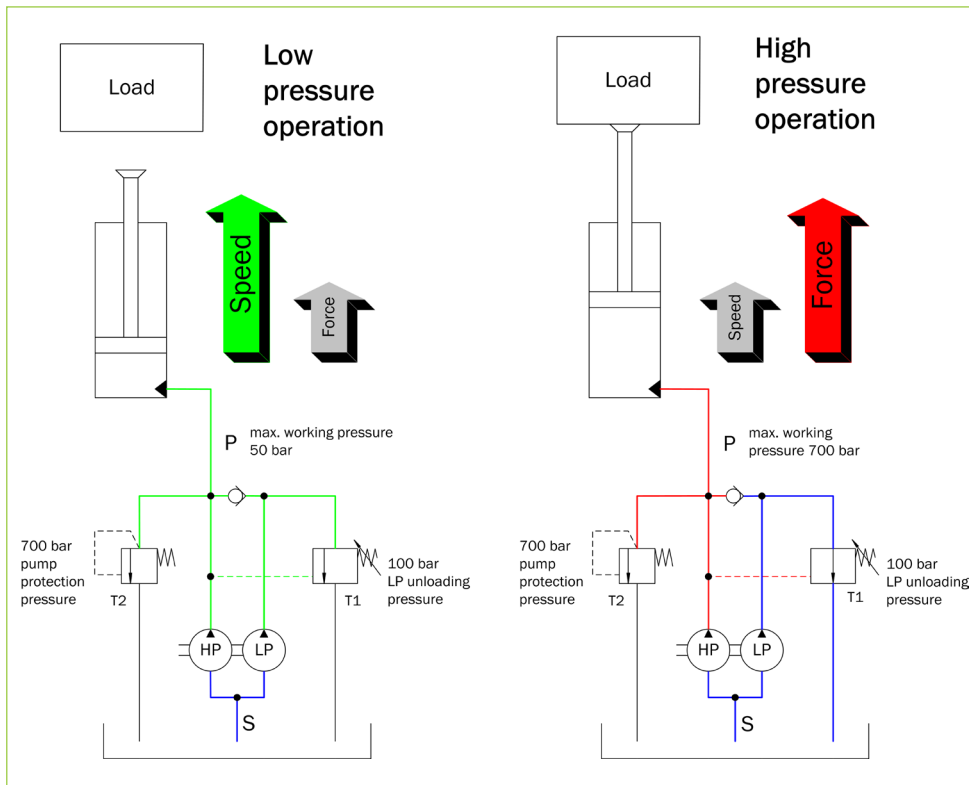

Pressure diagram

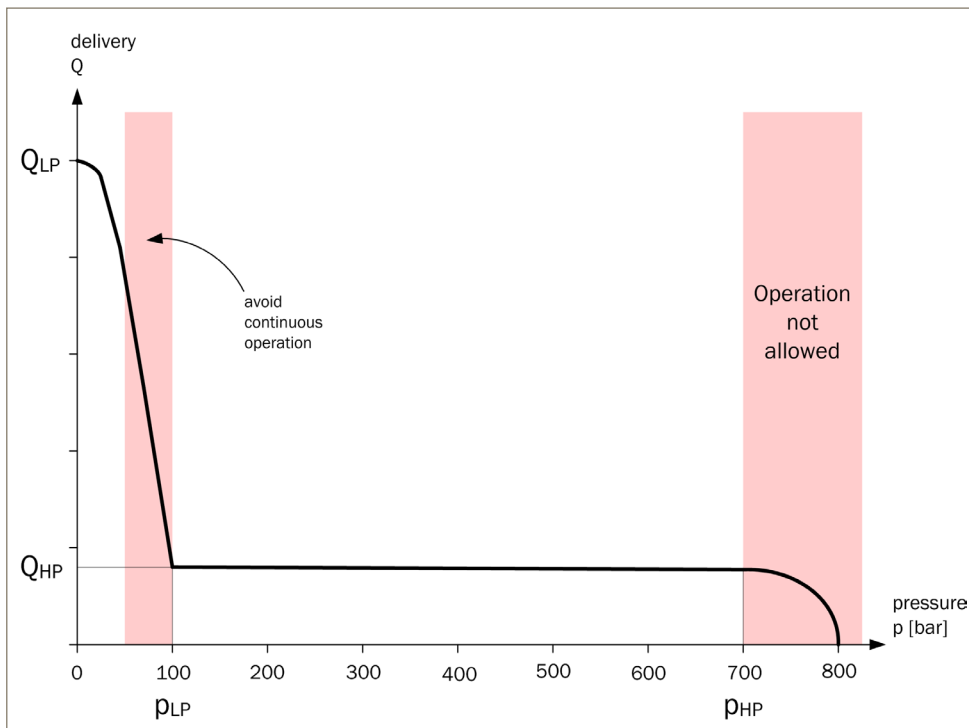

Valve installation

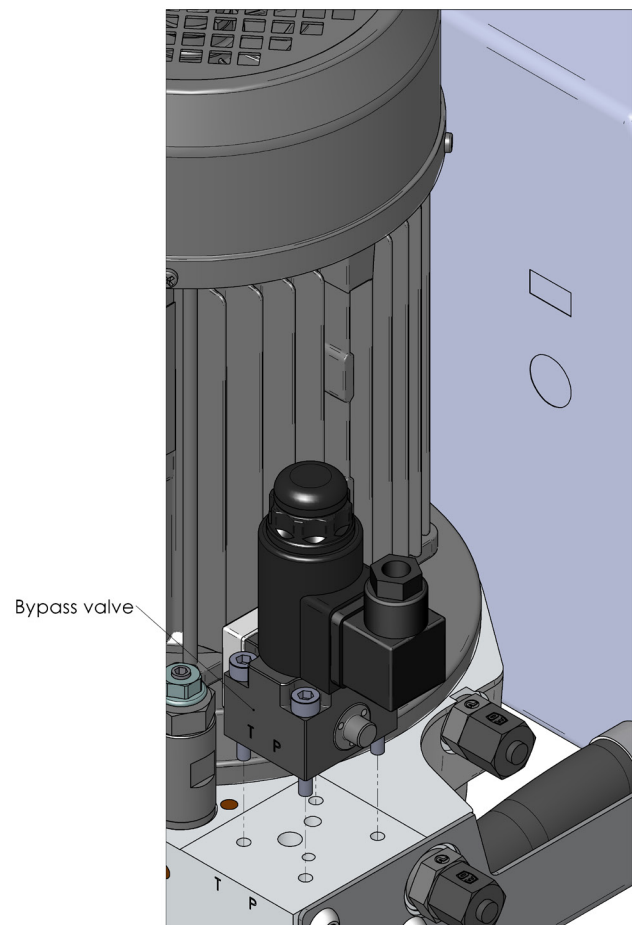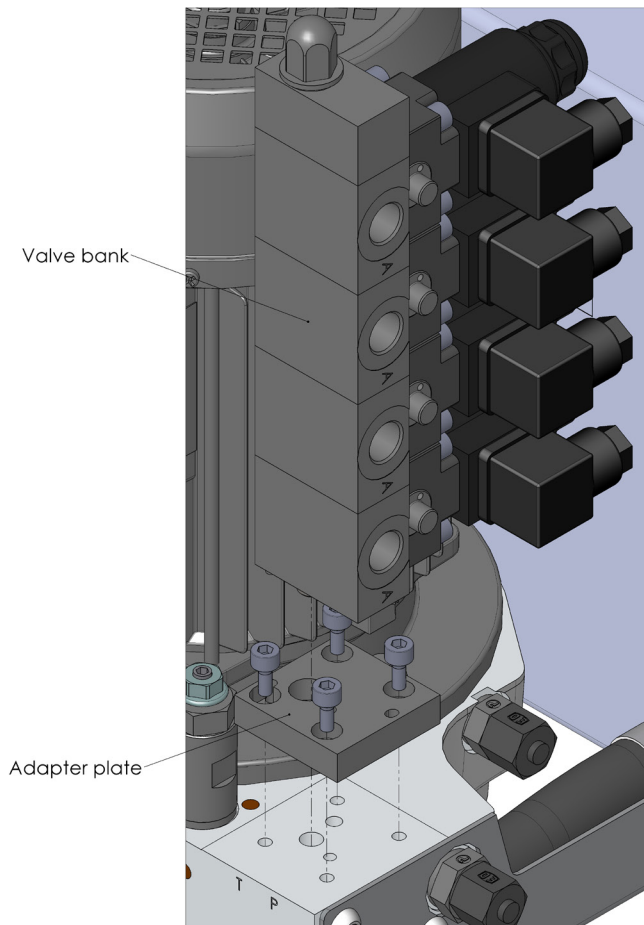

(Valve see technical data sheet WVH-4B)

Type	Part. No
Adapter plate	4002724

Type BKA
LP: 100 bar / 2,8 to 10,4 l/min HP: 700 bar / 0,3 to 1,8 l/min

Specification of BKA

Company:	Date:
Name:	Deadline offer:
E-Mail:	Curr. supplier:
Phone:	Application:

Requirement forecast

Requirement	Lot size	Target price	Delivery time as of order
Master sample			
Year 1			
Subsequent years			

Technical requirements

Feature	Specification
Design basis	
Pressure stages	☐ 1-circuit system with one pressure stage ☐ 1-circuit system with two pressure stages
Starting of the drive under pressurized pump	☐ required ☐ not required
Expected number of load cycles	
Operating cycle (idle / medium load / full load)	 s / s / s bar / bar / bar
Information on mechanical interfaces	☐ Holding bracket for oil tank ☐ Damping elements ☐ Platform
Desired operating medium	

Environmental conditions

Place of installation	☐ Closed room ☐ Outdoor area ☐ ATEX-area ☐
Temperature range	min. Temperature °C max. Temperature °C
Other environmental conditions	☐ Warm and humid environment ☐ Dusty environment ☐ Salty environment ☐

Dimensions

max. installation space (L x W x H)	 mm x mm x mm
Weight (incl. fluid)	 kg
Useable volume oil tank	☐ 2 L ☐ 6 L ☐ 7 L ☐

	Type BKA	
	LP: 100 bar / 2,8 to 10,4 l/min HP: 700 bar / 0,3 to 1,8 l/min	

Electrical data

Nominal motor power	☐ 0,55 kW ☐ 0,75 kW ☐ 1,1 kW ☐ 1,5 kW ☐ 2,2 kW	
Motor voltage	☐ Alternating current 1-phase 230 V	☐ Three-phase current 3-phase 400 V
Nominal speed (frequency dependent)	☐ 1'500 rpm (50Hz) ☐ 1'800 rpm (60Hz)	☐ 3'000 rpm (50Hz) ☐ 3'600 rpm (60Hz)
Maximum permissible current consumption at nominal load	 A	
Maximum permissible starting current consumption at nominal load	 A	
Valve control voltage	☐ 24 V (DC) ☐ 110 V (AC) ☐ 230 V (AC)	
Other electrical equipment (on arrangement)	☐ Switches ☐ Cable ☐ Plug ☐	

Pump unit

Max. operating pressure HP	☐ 700 bar (default) ☐ bar (max. 700 bar)	
Shut-off pressure LP (only for 2 pressure stages)	☐ 100 bar (default) ☐ bar (max. 150 bar)	
Nominal flow rate	LP ca. l/min	HP ca. l/min

Valve equipment

Function	See technical data sheet W VH-4B	
Other hydraulic equipment (by arrangement)	☐ Pressure gauge ☐ Return flow filter ☐ Oil cooler ☐ Hydraulic hoses ☐ Additional connection for tank reflow ☐ ☐ Hydraulic couplings ☐ ...	
		☐ G1/4" ☐ G3/8"

Note:

If available, please attach descriptions, hydraulic diagrams, technical data and sketches.

Bieri Hydraulik AG

Könizstrasse 274
CH-3097 Liebefeld
Tel. +41 31 970 09 09 | Fax +41 31 970 09 10
info@bieri hydraulics.com | www.bieri hydraulics.com

The information in this brochure relates to the operating conditions and applications described.

For applications and operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.